

Pioneer Dj

DJM-S3 MIXER PREPARE FOR BATTLE

SERATO DJ AND SERATO DVS ENABLED WITH
PRO-GRADE FEATURES

BUILT-IN SOUND CARD

MAGVEL CROSSFADER

SCRATCH-FRIENDLY LAYOUT

PROFESSIONAL SOUND QUALITY

INDEPENDENT CHANNEL FILTERS

TWO HEADPHONE OUTS

INDEPENDENT MIC SECTION

SIGNAL GND TERMINAL

serato  DJ



DJM-S3 MIXER

THE NEW ENTRY POINT TO THE SERATO SPECIFIED DJM SERIES

PRODUCT FEATURES



SERATO DJ AND DVS ENABLED

The DJM-S3 is Serato DJ and DVS Enabled so you can plug it into your PC/Mac and start using it with Serato DJ straight out of the box.



MAGVEL CROSSFADER

Perform smooth, accurate scratches with ease using the Magvel crossfader from the flagship DJM-900NXS2, which is durable for more than 10 million movements.



INDEPENDENT CHANNEL FILTERS

Bring creative flair to your performances with independent filters on each channel and add texture with parameter control.



TWO HEADPHONE OUTS

Choose between 1/4-inch stereo jack and 3.5 mm mini jack.

MAIN SPECIFICATIONS

Software

Serato DJ

Channels

Audio 2 channels, MIC 1 channel, AUX 1 channel

Inputs

LINE x 3 (RCA),
PHONO x 2 (RCA),
MIC x 1 (1/4" TS JACK)

Outputs

MASTER OUT x 2 (XLR x 1, RCA x 1),
HEADPHONE MONITOR OUT x 2 (1/4" STEREO
PHONE JACK, 3.5 mm STEREO MINI JACK)

USB ports

USB (B) x 1

Sampling Rate

48 kHz

D/A Converter

24-bit

A/D Converter

24-bit

Frequency Range

20 Hz~20 kHz (LINE)

S/N Ratio

94 dB (LINE)

Total Harmonic Distortion

0.005% (LINE-MASTER1)

Power supply

AC 100 V to 240 V, 50 Hz/60 Hz

Power consumption

DC12V 0.6A

Maximum Dimensions (W x D x H)

230 mm x 319.5 mm x 107.9 mm
(9.1 in x 12.6 in x 4.2 in)

Weight

3.0 kg / 6.6 lb

Accessories

Power cord, AC adaptor, USB cable, Operating Instructions (Quick Start Guide)

Serato DJ System Requirements

Windows

Windows® 10, 8.1, 7 (latest service pack)

Mac

mac OS Sierra, X 10.11, 10.10 (latest update)

Processor

Intel® processor Core™ i7, i5, i3 1.07 GHz

Memory

32-bit, 64-bit: 4GB or more of RAM

USB

Available USB 2.0 port

Free HDD Space

5GB

Display Resolution

1280 x 720

1 SIGNAL GND TERMINAL

Easily attach ground wires from analogue turntables.

2 PROFESSIONAL SOUND QUALITY


The XLR terminals ensures high-quality audio output.

3 INDEPENDENT MIC SECTION

Use a microphone and the Aux input at the same time.

4 BUILT-IN SOUND CARD

Connect to your PC/Mac using a single USB cable thanks to the built-in sound card inherited from the professional DJM-S9 mixer.

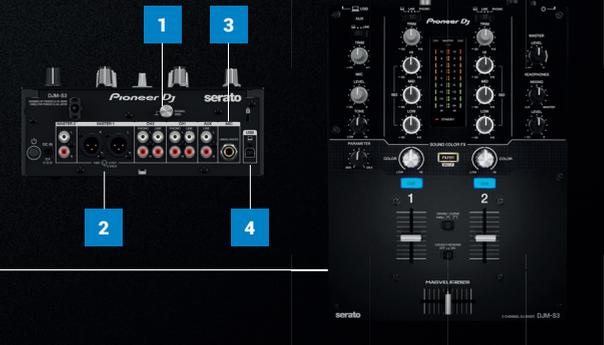

Disclaimer: specifications and price are subject to change. * Serato DJ is a registered trademark of Serato Audio Research Ltd. * Mac, macOS or OS X are trademarks of Apple Inc., registered in the US and other countries. * Windows® is a registered trademark of Microsoft Corporation in the US and other countries. * Intel® and Intel Core™ are registered trademarks of Intel Corporation in the US and other countries. * Other stated company names, product names, technology names, etc. are the trademarks or registered trademarks of their respective owners.

We've made every effort to show the product accurately, but colours and typography might be different in reality. Features and specifications are correct at the time of printing but are subject to change. Please speak to your Pioneer DJ dealer to make sure the product meets your needs.

Pioneer DJ Europe Ltd | Anteros Building, Odyssey Business Park, West End Road, South Ruislip, HA4 6QQ, UK | +44 (0) 203 761 7220
Pioneer DJ Americas, Inc | 2050 W. 190th Street, Suite 109, CA 90504, Torrance, USA | +1 (424) 488-0480
Pioneer DJ Corporation | 6-F, Yokohama i-Mark Place, 4-4-5 Minatomirai, Nishi-ku, Yokohama, Kanagawa 220-0012 Japan | +81 045-522-5400